

IPC/PTZ/NVR upgrade on web 6

Tiandy Technical Support Team 23/08/2020

Description


IPC/PTZ/NVR upgrade on web6

Prerequisites

- Already got FW

Set up steps

1. Choose English here then enter the user name/password and login.

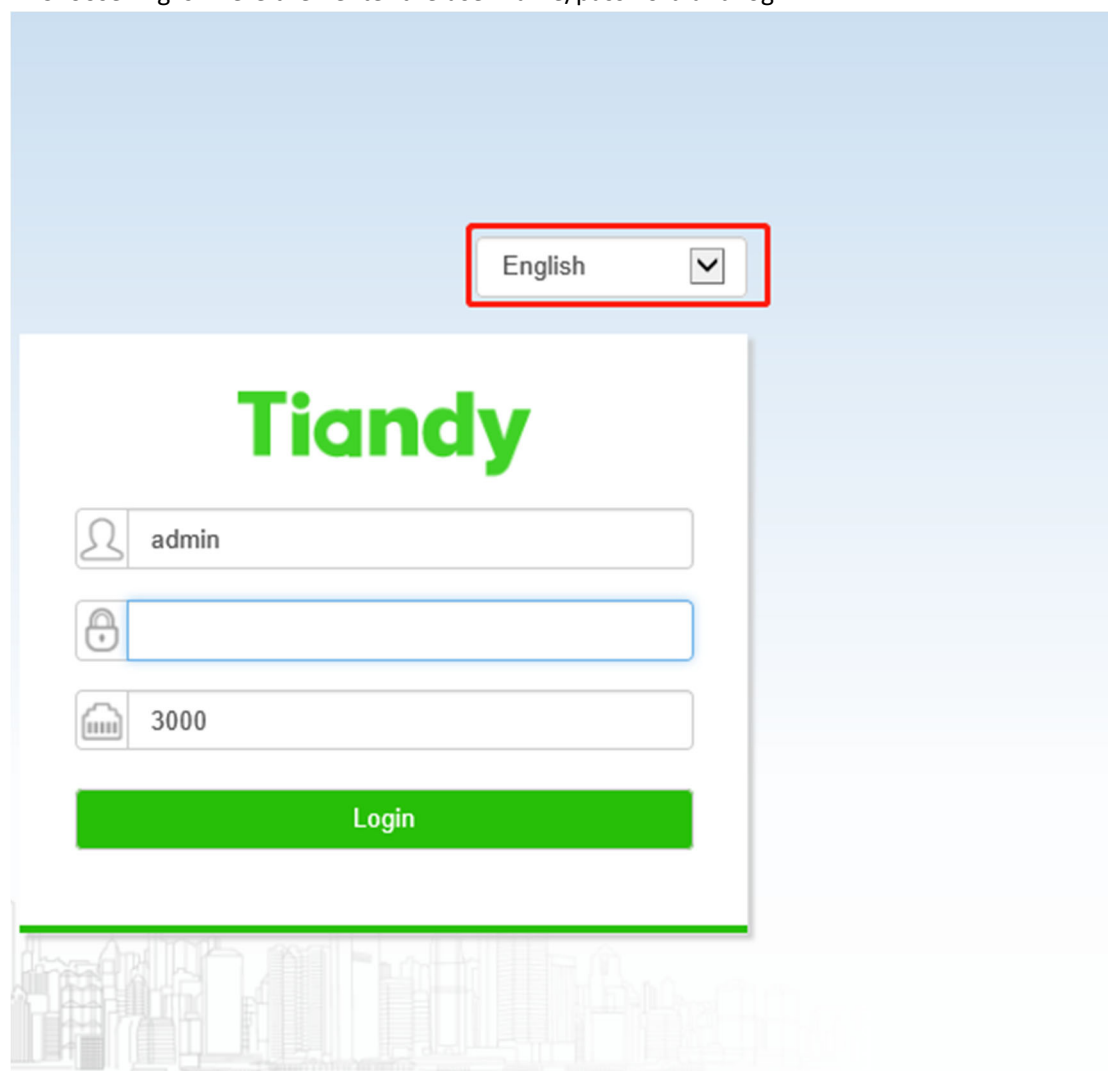

2. Select 'Configuration'.

Configuration

Network

DHCP

IPv4 Address: 10.30.10.8 IPv4 Subnet Mask: 255.255.255.0 Gateway: 10.30.10.1

HTTP Port: 80 RTSP Port: 554

Time

Region: (GMT+08:00)Beijing, Urumchi, Singa Local Time: 2020-08-23 16:27:14

NTP Server: time.windows.com Port: 123 Time Interval(minute): 60

Users

No.	User Name	Authority	Edit	Remove
1	Admin	Admin	Edit	
2	user1	Browse	Edit	Remove

©Tiandy Co.,Ltd All Rights Reserved

3. Choose 'System'-'Maintenance'-'Upgrade'.

Maintenance

Upgrade

Version Information

Factory ID ID0000801940330170170341

Serial Number
MAC 00:50:c2:21:11:11

Hardware Version 1015

Kernel Version NVSS_V14.0.6.20180928_SP1

Web Version 6.1.18.731

cgi Version CGI_V3.0.0.20180725

onvif Version ONVIF_V3.1.0.20190131

p2p Version P2P_V3.1.0.20180709

rtmp Version RTMP_V3.1.0.20180709

rtsp Version RTSP_V3.1.0.20190131

app Version APP_V3.1.0.20180709

Firmware Upgrade

Upgrade File
(* .box, *.bin)

©Tiandy Co.,Ltd All Rights Reserved

4. Click 'Browse' to choose the upgrade box we send you.

Tiandy Live View Playback Log **Configuration** EW

Basic Set **Maintaince** **Upgrade**

Audio Video Set

Network

Event Schedule

VCA

Storage

System

System

Users

Maintaince

Local PC Setting

Version Information

Factory ID ID0000801940330170170341

Serial Number

MAC 00:50:c2:21:11:11

Hardware Version 1015

Kernel Version NVSS_V14.0.6.20180928_SP1

Web Version 6.1.18.731

cgi Version CGI_V3.0.0.20180725

onvif Version ONVIF_V3.1.0.20190131

p2p Version P2P_V3.1.0.20180709

rtmp Version RTMP_V3.1.0.20180709

rtsp Version RTSP_V3.1.0.20190131

app Version APP_V3.1.0.20180709

Firmware Upgrade

Upgrade File

(* .box, *.bin)

©Tiandy Co.,Ltd All Rights Reserved

5. Click 'Upgrade' to finish S3E/S6 upgrade on web6. Do not turn off the power during upgrading.